


Certified by ISO9001 International Quality Control System

JXJ300-VIYG Series Bi-modal LED Arrow Lamps

Features & Specifications

- Conform to latest ITE specifications
- Retrofit design & UV stabilized lens
- MIL-STD-883 mechanical vibration
- MIL-STD-810F moisture resistant
- Compliance with FCC Title 47
- Full compatibility with NEMA controllers/conflict monitors
- Wide viewing angle for span wire/mast arm mount

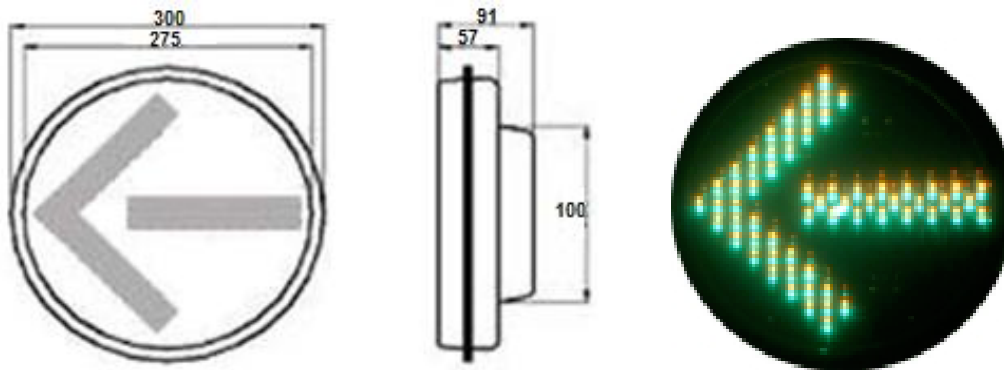

Model Number	JXJ300-VIYGACAD	JXJ300-VIYGACAD
Size (mm)	300mm	300mm
Color (nm)	Yellow (592)	Green (505)
Voltage (Typical)	120V - 60hz	120V - 60hz
Voltage Range	80V - 135V	80V - 135V
Power (w) Typical	6.5	7.0
Operation Temperature	-40°F to +165°F	-40°F to +165°F
Power Factor	> 0.9	> 0.9
T.H.D.	< 20%	< 20%
ITE Specifications	Yes	Yes

All characteristics, including visual characters, chromaticity, moisture and vibration resistance, electronic noise, transient protection, etc., are conformed to standards specified in ITE LED Vehicle Signal Modules.

For additional technical information or sales support regarding these and other LED products, please contact us at (972) 480-0888 or visit our website at www.trastarusa.com.